

NOBLE

NOBLE-19.TO

NOBLE-25.TO

NOBLE-32.TO

NOBLE-44.TO

NOBLE-56.TO

NOBLE-70.TO

NOBLE-72.TO

NOBLE-109.TO

DUNAVOX

20
YEARS

[↑ RETURN TO HOME](#)

al

DUNAVOX AROUND THE WORLD



MORE THAN
40
COUNTRIES AROUND THE WORLD

MORE THAN
100
MODELS

10
PRODUCT FAMILIES

Celebrating 20 years of global excellence

For twenty years, Dunavox has been synonymous with uncompromising quality in wine storage and preservation. Renowned as an award-winning brand, Dunavox blends minimalist design with outstanding functionality, advanced technology and meticulous engineering to create wine coolers that are both highly energy-efficient and exceptionally reliable.

Marking two decades of innovation, Dunavox today offers Europe's most extensive portfolio of more than hundred premium wine coolers. Distributed through a worldwide network of partners and supported by dedicated subsidiaries in the United Kingdom, Spain, Italy, Netherlands and Germany, Dunavox provides expert guidance, technical assistance and comprehensive after-sales service across the globe.

DUNAVOX Kft., Hungary - Headquarters

2151 Fót, Fehérkő utca 8/B
Phone: +36 27 594 054
Email: info@dunavox.com

DUNAVOX Deutschland GmbH, Germany

84056 Rottenburg Dieselstrasse 34
Phone: +49 8781 2014130
Email: deutschland@dunavox.com

DUNAVOX Benelux B.V., The Netherlands

Industrieweg 4H, Woerden
Phone: +31 085 0601720, WhatsApp: +31 615 444081
Email: nederland@dunavox.com, belgie@dunavox.com

DUNAVOX Italia s.r.l, Italy

31031 Caerano di San Marco
Phone: +39 0423 650022
Email: info@dunavox.it

DUNAVOX GB Ltd., The United Kingdom

Unit 3 Central Trading Estate, Chester, CH4 8SX
Phone: 01244 681 369
Email: sales.gb@dunavox.com

DUNAVOX Iberia sl, Spain & Portugal

08402 Granollers-Barcelona, C/ Pallars 6, planta 7ª
Phone: +34 938 700 895
Email: iberia@dunavox.com

DUNAVOX Poland Business Development Team, Poland

Phone: +48 661 955 506
Email: kontakt.polska@dunavox.com



DUNAVOX TECHNOLOGY

Optional door opening

The ideal solution for your kitchen

Push-to-open

A gentle push allows the door to open smoothly, providing effortless access to the bottles inside while preserving a clean, handle-free appearance and a refined, contemporary design character.



Handle

Available with a sleek black door and matching black handle, or a timeless Inox finish paired with a stainless steel handle — both featuring the classic door-opening mechanism. The integrated handle ensures smooth and intuitive manual operation.



Hidden handle

Elegantly recessed handles create a clean, contemporary look, enhancing the overall design with a refined, sophisticated, and timeless aesthetic.



Various door technology

Revolutionary design

Various door & finish options

Choose from black full glass, stainless steel, matt black or overlay panel finishes – ensuring a flawless fit with any kitchen design.



RAL colour door

Our exclusive bespoke service allows customers to select any RAL shade for their wine cooler, creating a perfectly coordinated match with their kitchen décor. In addition to the full colour palette, we offer three refined surface finishes — matt, high gloss, or metallic — ensuring a truly personalised and exceptional result. To complement the customised exterior, colour-matched shelves can also be selected, available in Mahogany, Dark Walnut, or Black, allowing the interior presentation to reflect the same design vision with complete harmony and sophistication.



Overlay Panel option

The overlay panel door option allows the wine cooler to blend seamlessly into your kitchen design, completely concealed behind matching cabinetry. A furniture panel identical to your kitchen fronts can be mounted on the cooler, ensuring a harmonious and integrated look.




Discreet technology, maximum experience

Ventilation, design and security in one

Integrated ventilation system

Designed for seamless installation beneath countertops or within cabinetry columns, without the need for additional plinth ventilation, thereby preserving the clean and streamlined aesthetics of the kitchen.

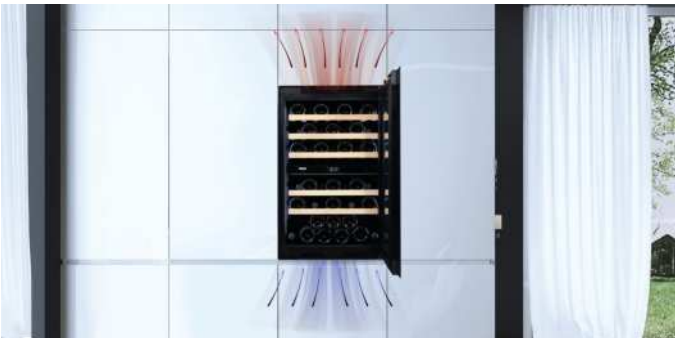

Front grille ventilation

The ventilation grille must be kept free; the warm air produced by the compressor is expelled through one side and the cooler air is drawn in on the other via a set of silent fans which enable the cooler to ventilate correctly. If running a plinth in front of the wine cooler, a grille must be installed into the plinth itself to ensure adequate ventilation and any heat sources near to the cooler will likely reduce the life span of the fridge, namely the compressor itself.



Integrated door alarm

An integrated door alarm provides additional peace of mind by alerting you if the door is left open or not fully closed. This smart feature helps maintain stable temperature conditions inside the cooler and prevents unnecessary energy consumption. Subtle and reliable, it ensures both your wines and your appliance remain perfectly protected.



Where fine wine meets smart design

Smart cooling - smart lighting - smarter living


Single & dual temperature zones

Dunavox wine coolers are available with one or two cooling zones. Configuring the desired temperature is easy at single, dual or even three cooling zone wine coolers.



WIFI & Smart App

Stay effortlessly connected to your collection. Monitor and adjust your cooler from anywhere with WiFi and a dedicated smart app.

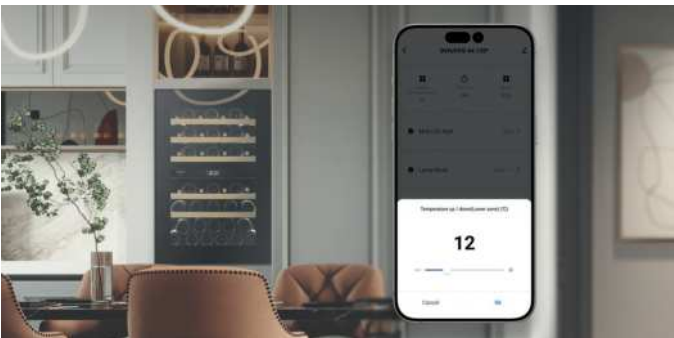

Multi LED light

Tailor the ambience with adjustable white, amber or blue lighting, and a choice of modes to suit every occasion.



Various display technologies

A smarter way to chill - beautifully displayed

TFT touch screen

An intuitive, full-colour touch display provides smooth, responsive navigation, giving you complete control over every function and setting directly at your fingertips.



LCD touch screen

The device features detailed touch controls with enhanced functionality, displaying multiple settings and offering users the ability to customize various options according to their preferences.



LED touch screen

A clear, elegant interface for setting temperatures and lighting at the touch of a button.



Shelving systems

Choose the one that suits you best

Telescopic wooden shelves

Extendable, smooth sliding, telescopic shelves provide full visibility and access to all bottles of your collection. Access your wines easily with shelving that pulls all the way out.



Label view shelves

The shelving is designed to provide clear label visibility while maintaining a clean, well-organised interior. Its structured layout keeps bottles neatly aligned and contributes to a balanced, refined overall look.



Opened bottles storage (HOME)

Home series offers a unique feature to store opened bottles in the wine fridges in standing position. The front part of the unit is designed for standing bottle storage.



Places of use

Use the wine cooler - wherever you want

Yacht & Ship installations

Indulge in the luxury of perfectly chilled wines at sea with our state-of-the-art wine fridges aboard cruise ships. Designed to preserve the delicate flavors and aromas of your favorite vintages, our sleek and efficient wine fridges ensure that every sip is as delightful as the first. Elevate your onboard experience with the convenience and sophistication of expertly stored wines, enhancing every moment of your voyage.



Freestanding installations (HOME)

These coolers can't be built-in or place under a counter. Only the freestanding installation is allowed because these coolers don't have a regular front grid where the ventillation can be done. For proper functioning the units require free space around them. The condenser is installed inside the corpus, this means the heat extraction happens at the sides and at the top of the cooler. That's why it's crucial to let these units stand freely.



Outdoor placement

Dunavox wine coolers are intended to use indoor, however if you follow a few conditions the units can also be used outdoors. Keep the fridge out of direct sunlight, and install it in a covered area protected from rain. Do not keep the unit outside when the ambient temperature fall below 18°C.



DUNAVOX

PICTOGRAMS

1

1 Cooling zone

A single-temperature wine cooler designed for storing one type or style of wine at a consistent, ideal temperature. Perfect for long-term preservation of either reds or whites, ensuring stable conditions throughout the cabinet.

2

2 Cooling zone

A dual-zone wine cooler equipped with two separate temperature compartments. Perfect for storing white, rosé, and red wines at their optimal serving or preservation temperatures within one unit.



Push-to-open

A gentle press opens the door automatically, reflecting the clean aesthetics of today's handle-less kitchen design while offering effortless accessibility.




Handle

Classic and functional design: black doors are paired with matching black handles, while Inox doors feature stainless-steel handles. Both provide a refined and ergonomic door-opening solution.



WIFI & Smart App

Stay connected to your collection wherever you are. Through integrated Wi-Fi and a dedicated smart app, you can monitor and control your cooler remotely with precision and ease.



TFT touch screen

A full-colour TFT display provides intuitive navigation for easy setting adjustment and precise temperature control.



LCD touch screen

The sophisticated LCD display offers detailed control options and provides comprehensive feedback on the appliance's operation and settings. Additionally, its customizable lighting functions enhance overall user comfort.



LED touch screen

An intuitive LED interface enables simple temperature and lighting adjustments. Designed for quick operation and elegant visual clarity.



Hidden handle door

A discreetly recessed handle offers a minimalist, contemporary look, aligning with the latest under-counter design trends and premium kitchen aesthetics.



Multi LED light

Adjustable multi-colour LED lighting allows you to create the perfect atmosphere. Choose between white, amber, or blue tones, with various modes to match any setting or mood.



Integrated ventilation

The integrated ventilation system allows seamless integration anywhere in your home without extra plinth vents. The unit is self-ventilating, simplifying installation and avoiding special furniture planning, while preserving clean kitchen aesthetics and optimal cooling.




Overlay Panel

An optional overlay door panel allows full visual integration with your kitchen furniture. The wine cooler can be concealed behind matching cabinetry for a flawless, built-in appearance.



Telescopic wooden shelves

Crafted from high-quality wood, these smooth-gliding telescopic shelves extend for easy access and perfect visibility of your wine collection.



Label view shelves

The shelf configuration supports clear label presentation and an orderly interior, ensuring bottles remain neatly positioned and visually well arranged.



Champagne & Prosecco

This dedicated configuration is optimised for storing champagne and prosecco, providing the ideal temperature range for sparkling wines. Shelving and spacing are tailored to accommodate larger bottle formats securely.



Yacht & Ship approved

Dunavox wine coolers bring luxury to life at sea, offering perfect preservation even aboard yachts and cruise vessels. Each model safeguards delicate aromas and flavours, elevating onboard dining with refined wine service.



UV light protection

A UV-filtered glass door protects wines from the harmful effects of sunlight, preserving their aroma and structure. Direct exposure to sunlight should still be avoided to maintain optimal cellar conditions and product longevity.




Integrated

Integrated units are designed for installation within kitchen cabinetry. They require rear ventilation and a plinth grille for airflow; without this, cooling may be compromised. Models with an integrated ventilation system need no rear or plinth ventilation.



Undercounter

Undercounter models are designed to fit neatly beneath kitchen worktops, blending seamlessly into the cabinetry. Selected models may also be used as freestanding units, offering installation flexibility without compromising performance.



Fully integrated or undercounter

Thanks to integrated ventilation system, Dunavox coolers can be built into columns or counters with ease. Available across the Noble, Prime, Horizon and Spirit collections.



Bottle loading

Bottle loading diagrams show the maximum number of bottles that fit in the cabinet. Actual capacity varies with bottle shape and size, and larger or unusual bottles may reduce the total. For details, refer to the product's user manual.




Zone temperatures

Cooling temperatures can be precisely set between 5°C and 20°C in single-zone models. In dual-zone versions, temperatures can be adjusted separately, typically between 5°C and 12°C in the upper zone and 12°C and 20°C in the lower zone.



Noise (dB)

Specifies the average noise emission level of the unit, expressed in decibels (dB). Dunavox coolers are engineered for quiet and low-vibration operation, ensuring minimal disturbance in living or kitchen spaces.



Soft-close hinge

This precision-engineered hinge provides a smooth and controlled door movement through soft-close technology. It eliminates slamming, ensures silent operation, and contributes to both user comfort and product longevity.

DUNAVOX COLLECTION



NOBLE

NOBLE-19.TO	11
NOBLE-25.TO	12
NOBLE-32.TO	13
NOBLE-44.TO	14
NOBLE-56.TO	15
NOBLE-70.TO	16
NOBLE-72.TO	17
NOBLE-109.TO	18

NOBLE & PRIME

ART OF PERFECTION

NOBLE

DVN-19.TO
DVN-25.TO
DVN-32.TO
DVN-44.TO
DVN-56.TO
DVN-70.TO
DVN-72.TO
DVN-109.TO

PRIME

DVP-19
DVP-25
DVP-32
DVP-44
DVP-70



NOBLE-19.TO

Black Glass DVN-19.50B.TO EAN: 5999558435332







455
559
590

Door options



5
5
9
19

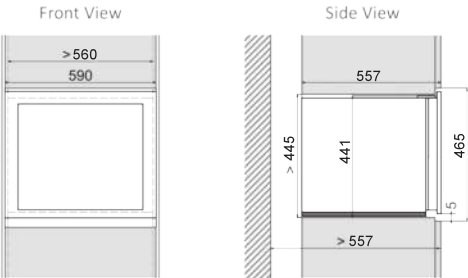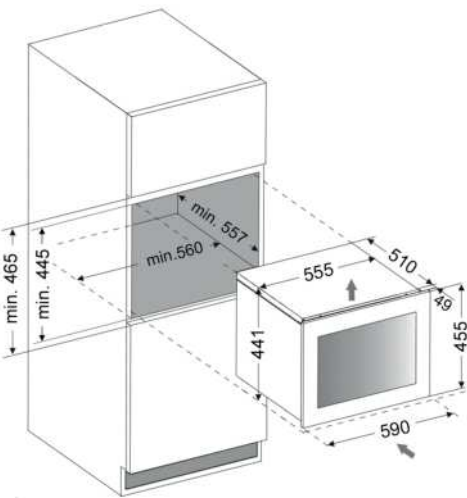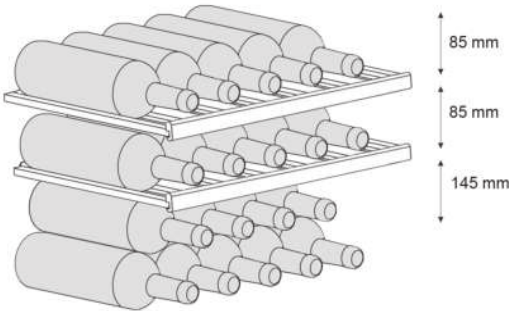

1

Cooling zone

19

Bottle capacity

37dB

Noise level

5-18°C

Cooling ranges

Fully integrated or undercounter

Installation type

UV protection

Glass door

Telescopic wooden shelves

Shelf

Champagne & prosecco

Bottle types

Multi LED light

Interior light

Integrated ventilation

Ventilation type

TFT touch screen

Display type

WIFI & Smart app

WIFI & Smart App

FEATURES	PERFORMANCE
Installation type	Cooling zones
Fully integrated or undercounter	1
Bottle capacity	Cooling ranges
19	5-18°C
Type of opening	Heater
Push-to-open	No
Type of hinges	Energy class
Soft closing Hettich hinge	F
Display type	Power consumption
TFT touch screen	100 kWh/a
Operating instructions	Rated power
Suitable for storing champagne bottles	220-240V, 50Hz, 0,5A
Installation requirements	Product dimensions (HxWxD) in mm
Integrated ventilation system	455x590x559 / 455x590x550
Shelf	Packing dimensions (HxWxD) in mm
Telescopic wooden shelves	500x660x650
Low vibration	Noise level
Yes	37dB
Interior light	Cooling type
Multi LED light (white, amber, blue)	Fan assisted cooling, compressor
WIFI & Smart App	Glass door
Yes	UV protected, 2 layers of glass + Low-E, reversible

TECHNICAL INFORMATION	
Bottle types	Dimension of ventilation grille in mm
Bordeaux, champagne	-
Handle colour / Dimensions	Climate class
-	N
Lock	Refrigerant type / Amount
No	R600a / 23g
Door opening sensor	Power cord length
Yes	1,8 m
Display colour	Ventilation type
Colorful display	Integrated ventilation
Number of shelves	Temperature memory function
2	Yes, in case of power failure
Shelf height in mm	Defrosting
2x85mm 1x145mm	Manual
Internal air circulation	Total volume
Yes, 1 fan	50 l
Carbon filter	Recommended use
No	Domestic
Internal dimensions (HxWxD) in mm	Internal humidity
335x480x345	50-80%
Net / Gross weight	Cabinet material / Colour
34kg / 39kg	Metal / Black

*The maximum bottle capacity of the appliance depends on the type and size of the wine bottles stored inside.

NOBLE-25.TO

Black Glass DVN-25.65DB.TO EAN: 5999558435349





595
563
590

Door options



Black Glass


7
7
5
6
25

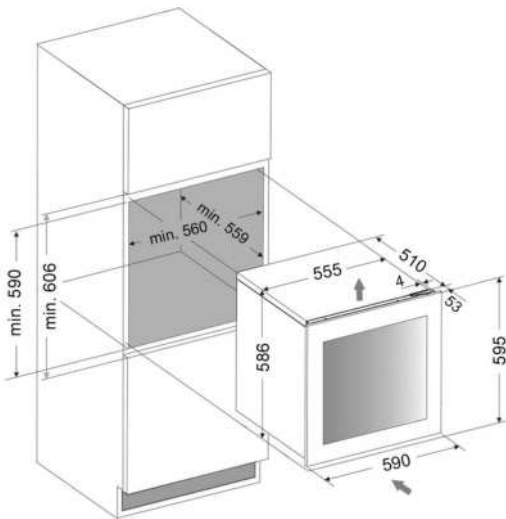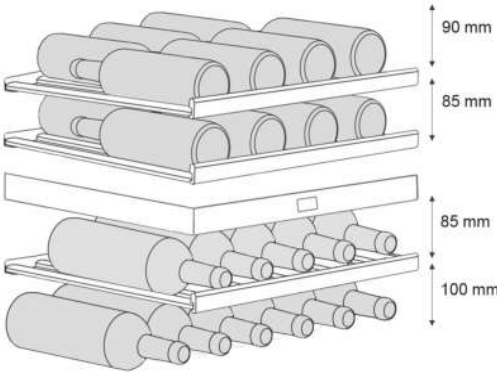


Front View



Side View



Top View



2

Cooling zone

25


Bottle capacity



36dB



5-10°C
10-18°C



Fully integrated
or undercounter



UV light
protection



Telescopic
wooden shelves




Champagne
& prosecco



Multi LED
light



Integrated
ventilation



TFT touch
screen



WIFI &
Smart app

FEATURES	PERFORMANCE
Installation type	Cooling zones
Fully integrated or undercounter	2
Bottle capacity	Cooling ranges
25	5-10°C // 10-18°C
Type of opening	Heater
Push-to-open	Yes
Type of hinges	Energy class
Soft closing Hettich hinge	F
Display type	Power consumption
TFT touch screen	101 kWh/a
Operating instructions	Rated power
Suitable for storing champagne bottles	220-240V, 50Hz, 0,6A
Installation requirements	Product dimensions (HxWxD) in mm
Integrated ventilation system	595x590x563 / 595x590x550
Shelf	Packing dimensions (HxWxD) in mm
Telescopic wooden shelves	645x650x660
Low vibration	Noise level
Yes	36dB
Interior light	Cooling type
Multi LED light (white, amber, blue)	Fan assisted cooling, inverter compressor
WIFI & Smart App	Glass door
Yes	UV protected, 2 layers of glass + Low-E, reversible

TECHNICAL INFORMATION	
Bottle types	Dimension of ventilation grille in mm
Bordeaux, champagne	-
Handle colour / Dimensions	Climate class
-	N
Lock	Refrigerant type / Amount
No	R600a / 35g
Door opening sensor	Power cord length
Yes	1,8 m
Display colour	Ventilation type
Colorful display	Integrated ventilation
Number of shelves	Temperature memory function
3	Yes, in case of power failure
Shelf height in mm	Defrosting
1x90mm 2x85mm 1x100mm	Manual
Internal air circulation	Total volume
Yes, 1 fan	65 l
Carbon filter	Recommended use
No	Domestic
Internal dimensions (HxWxD) in mm	Internal humidity
445x485x400	50-80%
Net / Gross weight	Cabinet material / Colour
45kg / 50kg	Metal / Black


*The maximum bottle capacity of the appliance depends on the type and size of the wine bottles stored inside.

NOBLE-32.TO

Black Glass DVN-32.85DB.TO EAN: 5999558436417
Overlay Panel DVN-32.85DOP.TO EAN: 5999558436414



715
563
590

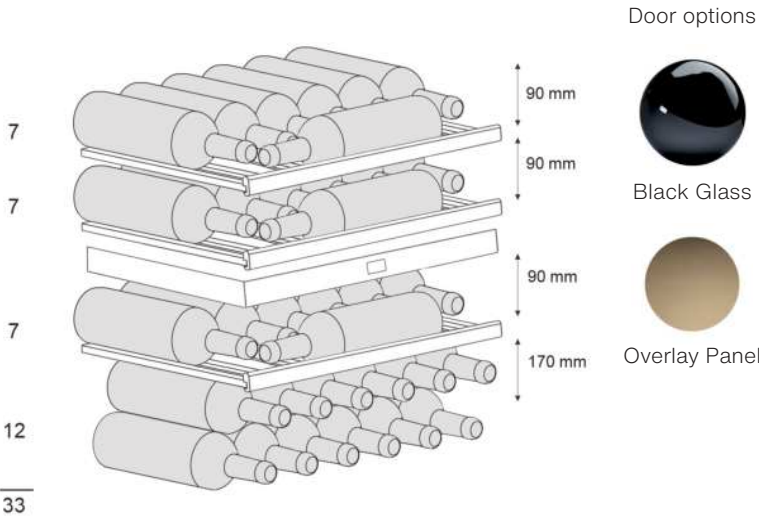

2

Cooling zone

32


Bottle capacity



36dB



5-10°C
10-18°C



Fully integrated or undercounter



UV light protection



Telescopic wooden shelves



Champagne & prosecco



Multi LED light



Integrated ventilation



TFT touch screen



WIFI & Smart app

FEATURES	PERFORMANCE
Installation type	Cooling zones
Fully integrated or undercounter	2
Bottle capacity	Cooling ranges
32	5-10°C // 10-18°C
Type of opening	Heater
Push-to-open	Yes
Type of hinges	Energy class
Soft closing Hettich hinge	F
Display type	Power consumption
TFT touch screen	103 kWh/a
Operating instructions	Rated power
Suitable for storing champagne bottles	220-240V, 50Hz, 0,6A
Installation requirements	Product dimensions (HxWxD) in mm
Integrated ventilation system	715x590x563 / 715x590x550
Shelf	Packing dimensions (HxWxD) in mm
Telescopic wooden shelves	765x650x660
Low vibration	Noise level
Yes	36dB
Interior light	Cooling type
Multi LED light (white, amber, blue)	Fan assisted cooling, inverter compressor
WIFI & Smart App	Glass door
Yes	UV protected, 2 layers of glass + Low-E, reversible

TECHNICAL INFORMATION	
Bottle types	Dimension of ventilation grille in mm
Bordeaux, rhine, champagne	-
Handle colour / Dimensions	Climate class
-	N
Lock	Refrigerant type / Amount
No	R600a / 30g
Door opening sensor	Power cord length
Yes	2 m
Display colour	Ventilation type
Colorful display	Integrated ventilation
Number of shelves	Temperature memory function
3	Yes, in case of power failure
Shelf height in mm	Defrosting
3x90mm 1x170mm	Manual
Internal air circulation	Total volume
Yes, 1 fan	85 l
Carbon filter	Recommended use
No	Domestic
Internal dimensions (HxWxD) in mm	Internal humidity
535x485x395	50-80%
Net / Gross weight	Cabinet material / Colour
48kg / 53kg	Metal / Black



*The maximum bottle capacity of the appliance depends on the type and size of the wine bottles stored inside.


NOBLE-44.TO



Black Glass DVN-44.120DB.TO EAN: 5999558435356



882
563
590

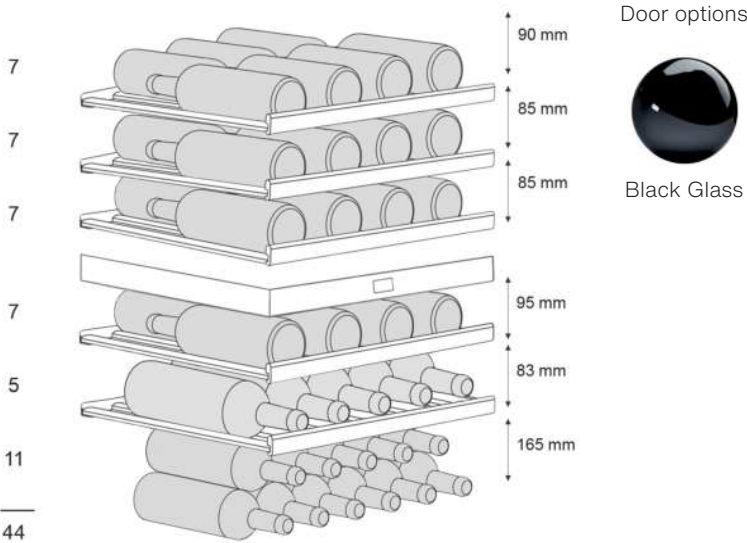

2

Cooling zone

44

Bottle capacity

36dB

Low vibration

5-10°C
10-18°C

Cooling ranges

Fully integrated
or undercounter

Installation type

UV protection

Glass door

Telescopic
wooden shelves

Shelf

Champagne
& prosecco

Bottle types

Multi LED
light

Interior light

Integrated
ventilation

Ventilation type



TFT touch
screen

Display type

WIFI &
Smart app

WIFI & Smart App

FEATURES	PERFORMANCE
Installation type	Cooling zones
Fully integrated or undercounter	2
Bottle capacity	Cooling ranges
44	5-10°C // 10-18°C
Type of opening	Heater
Push-to-open	Yes
Type of hinges	Energy class
Soft closing Hettich hinge	F
Display type	Power consumption
TFT touch screen	106 kWh/a
Operating instructions	Rated power
Suitable for storing champagne bottles	220-240V, 50Hz, 0,6A
Installation requirements	Product dimensions (HxWxD) in mm
Integrated ventilation system	882x590x563 / 882x590x550
Shelf	Packing dimensions (HxWxD) in mm
Telescopic wooden shelves	930x650x660
Low vibration	Noise level
Yes	36dB
Interior light	Cooling type
Multi LED light (white, amber, blue)	Fan assisted cooling, inverter compressor
WIFI & Smart App	Glass door
Yes	UV protected, 2 layers of glass + Low-E, reversible

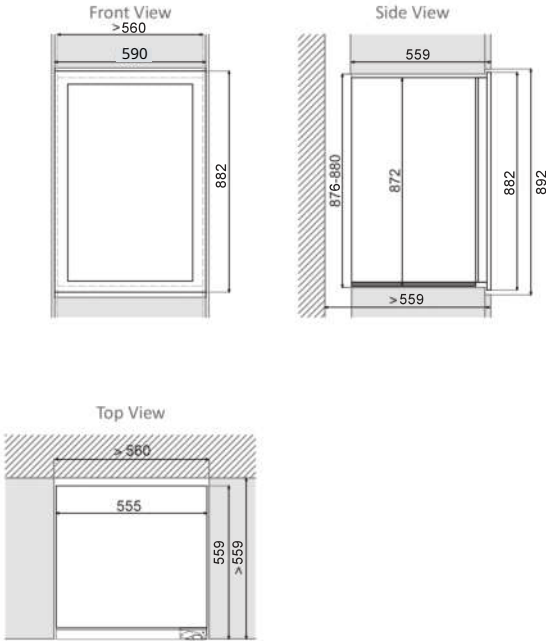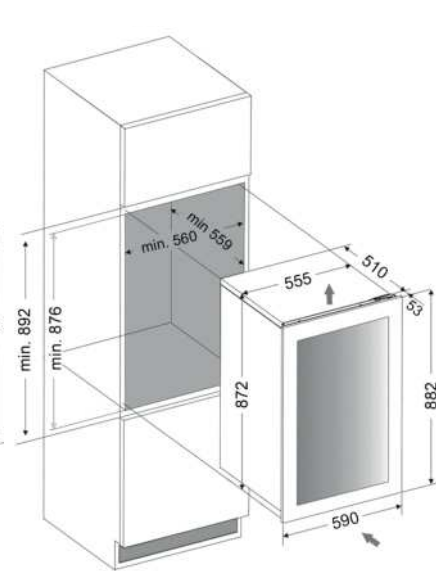

TECHNICAL INFORMATION	
Bottle types	Dimension of ventilation grille in mm
Bordeaux, rhine, champagne	-
Handle colour / Dimensions	Climate class
-	N
Lock	Refrigerant type / Amount
No	R600a / 35g
Door opening sensor	Power cord length
Yes	2 m
Display colour	Ventilation type
Colorful display	Integrated ventilation
Number of shelves	Temperature memory function
5	Yes, in case of power failure
Shelf height in mm	Defrosting
1x90mm 2x85mm 1x95mm 1x83mm 1x165mm	Manual
Internal air circulation	Total volume
Yes, 1 fan	119 l
Carbon filter	Recommended use
No	Domestic
Internal dimensions (HxWxD) in mm	Internal humidity
730x480x405	50-80%
Net / Gross weight	Cabinet material / Colour
58kg / 63kg	Metal / Black


*The maximum bottle capacity of the appliance depends on the type and size of the wine bottles stored inside.

NOBLE-56.TO

Black Glass DVN-56.146DB.TO EAN: 5999558436599



1055
557
590

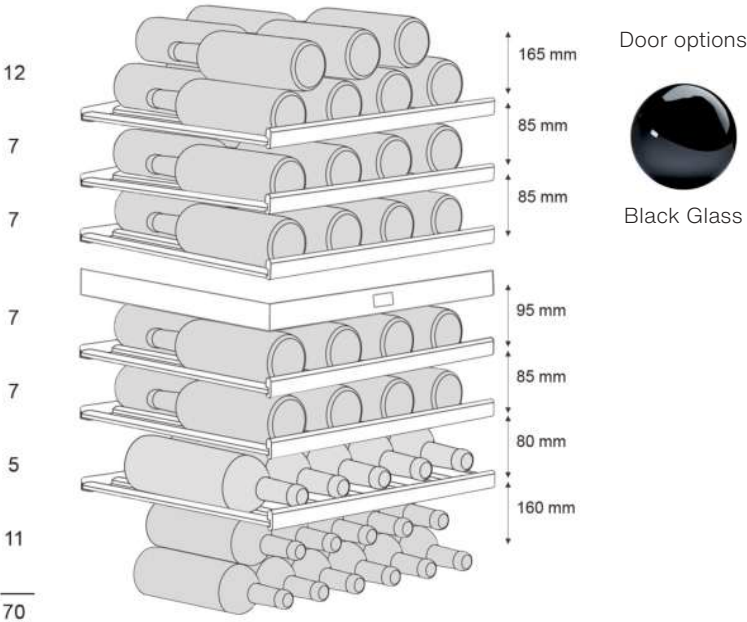

2

Cooling zone

56

Bottle capacity



36dB



5-10°C
10-18°C



Integrated



UV light protection



Telescopic wooden shelves



Champagne & prosecco



Multi LED light



Integrated ventilation





TFT touch screen



WIFI & Smart app

FEATURES	PERFORMANCE
Installation type	Cooling zones
Fully integrated	2
Bottle capacity	Cooling ranges
56	5-10°C // 10-18°C
Type of opening	Heater
Push-to-open	Yes
Type of hinges	Energy class
Soft closing Hettich hinge	F
Display type	Power consumption
TFT touch screen	106 kWh/a
Operating instructions	Rated power
Suitable for storing champagne bottles	220-240V, 50Hz, 0,6A
Installation requirements	Product dimensions (HxWxD) in mm
Integrated ventilation system	1055x590x557
Shelf	Packing dimensions (HxWxD) in mm
Telescopic wooden shelves	1100x650x660
Low vibration	Noise level
Yes	36dB
Interior light	Cooling type
Multi LED light (white, amber, blue)	Fan assisted cooling, inverter compressor
WIFI & Smart App	Glass door
Yes	UV protected, 2 layers of glass + Low-E, reversible

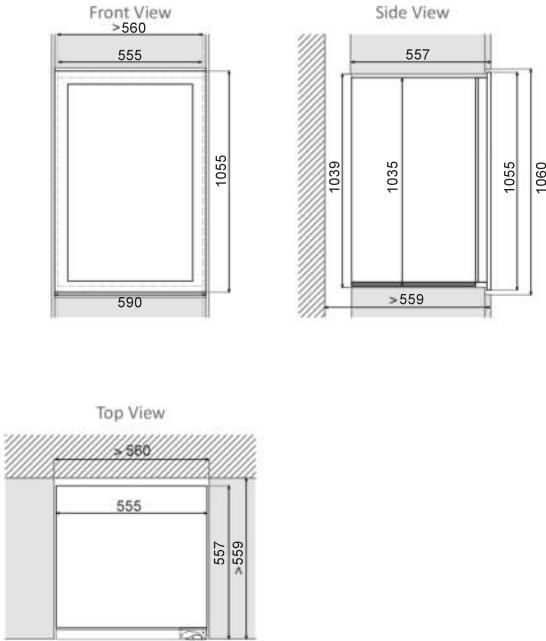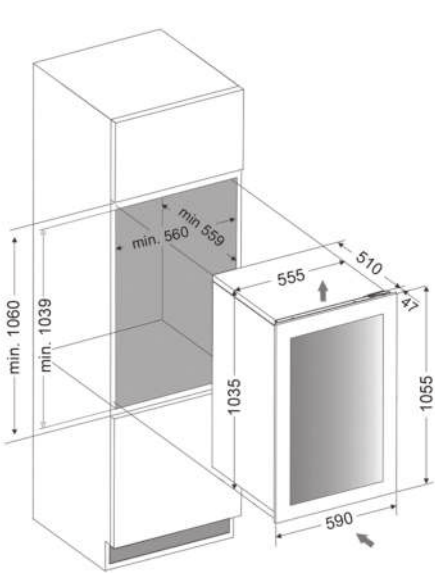

TECHNICAL INFORMATION	
Bottle types	Dimension of ventilation grille in mm
Bordeaux, rhine, champagne	-
Handle colour / Dimensions	Climate class
-	N
Lock	Refrigerant type / Amount
No	R600a / 35g
Door opening sensor	Power cord length
Yes	2 m
Display colour	Ventilation type
Colorful display	Integrated ventilation
Number of shelves	Temperature memory function
6	Yes, in case of power failure
Shelf height in mm	Defrosting
1x165mm 2x85mm 1x95mm 1x85mm 1x80mm 1x160mm	Manual
Internal air circulation	Total volume
Yes, 2 fans	145 l
Carbon filter	Recommended use
No	Domestic
Internal dimensions (HxWxD) in mm	Internal humidity
895x485x400	50-80%
Net / Gross weight	Cabinet material / Colour
64kg / 76kg	Metal / Black







*The maximum bottle capacity of the appliance depends on the type and size of the wine bottles stored inside.

NOBLE-70.TO



Black Glass DVN-70.185DB.TO EAN: 5999558435592

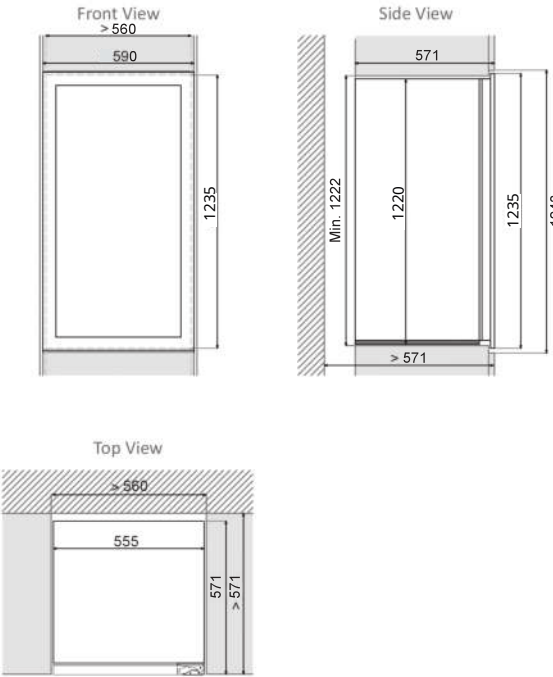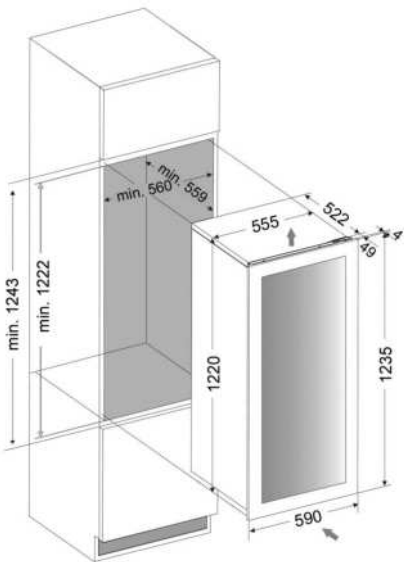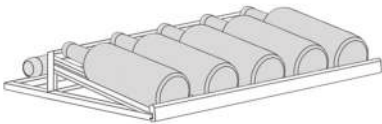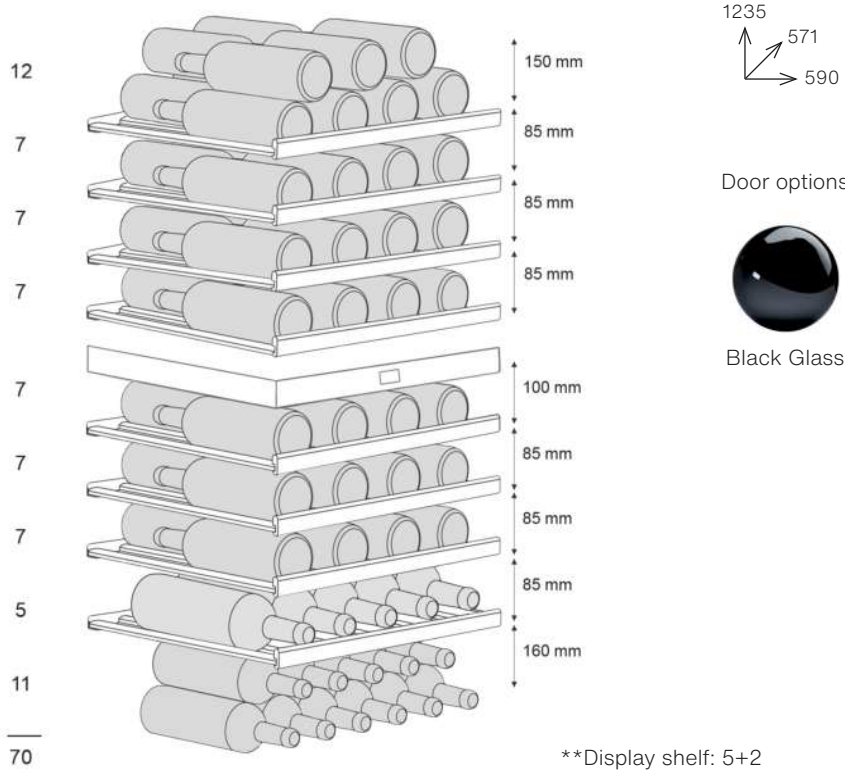

2

Cooling zone

70

Bottle capacity

36dB

Noise level

5-10°C
10-18°C

Cooling ranges

Fully integrated
or undercounter

Installation type

UV protection

UV light protection

Telescopic
wooden shelves

Shelf

Champagne
& prosecco

Bottle types

Multi LED
light

Interior light

Integrated
ventilation

Dimension of ventilation grille in mm

TFT touch
screen

Display type

WIFI & Smart app

WIFI & Smart App

FEATURES	PERFORMANCE
Installation type	Cooling zones
Fully integrated	2
Bottle capacity	Cooling ranges
70	5-10°C // 10-18°C
Type of opening	Heater
Push-to-open	Yes
Type of hinges	Energy class
Soft closing Hettich hinge	F
Display type	Power consumption
TFT touch screen	112 kWh/a
Operating instructions	Rated power
Suitable for storing champagne bottles	220-240V, 50Hz, 0,75A
Installation requirements	Product dimensions (HxWxD) in mm
Integrated ventilation system	1235x590x571 / 1235x590x562
Shelf	Packing dimensions (HxWxD) in mm
Telescopic wooden shelves & display shelf	1275x650x660
Low vibration	Noise level
Yes	36dB
Interior light	Cooling type
Multi LED light (white, amber, blue)	Fan assisted cooling, inverter compressor
WIFI & Smart App	Glass door
Yes	UV protected, 2 layers of glass + Low-E, reversible

TECHNICAL INFORMATION	
Bottle types	Dimension of ventilation grille in mm
Bordeaux, rhine, champagne	-
Handle colour / Dimensions	Climate class
-	N
Lock	Refrigerant type / Amount
No	R600a / 50g
Door opening sensor	Power cord length
Yes	2 m
Display colour	Ventilation type
Colorful display	Integrated ventilation
Number of shelves	Temperature memory function
8	Yes, in case of power failure
Shelf height in mm	Defrosting
1x150mm 3x85mm 1x100mm 3x85mm 1x160mm	Manual
Internal air circulation	Total volume
Yes, 2 fans	186 l
Carbon filter	Recommended use
No	Domestic
Internal dimensions (HxWxD) in mm	Internal humidity
1075x485x400	50-80%
Net / Gross weight	Cabinet material / Colour
71kg / 81kg	Metal / Black

*The maximum bottle capacity of the appliance depends on the type and size of the wine bottles stored inside.

**One display shelf replaces two regular shelves.

NOBLE-72.TO

Black Glass DVN-72.291DB.TO EAN: 5999558436544



1784
565
590

Door options



2

Cooling zone

72

Bottle capacity



40dB




5-10°C
10-18°C



Integrated



UV light protection



Label view shelves



Champagne & prosecco



Multi LED light



Integrated ventilation






TFT touch screen



WIFI & Smart app

FEATURES	PERFORMANCE
Installation type	Cooling zones
Fully integrated	2
Bottle capacity	Cooling ranges
72	5-10°C // 10-18°C
Type of opening	Heater
Push-to-open	Yes
Type of hinges	Energy class
Soft closing Hettich hinge	G
Display type	Power consumption
TFT touch screen	168 kWh/a
Operating instructions	Rated power
Suitable for storing champagne bottles	220-240V, 50Hz, 0,75A
Installation requirements	Product dimensions (HxWxD) in mm
Integrated ventilation system	1784x590x565
Shelf	Packing dimensions (HxWxD) in mm
Label view shelves	1835x650x660
Low vibration	Noise level
Yes	40dB
Interior light	Cooling type
Multi LED light (white, amber, blue)	Fan assisted cooling, inverter compressor
WIFI & Smart App	Glass door
Yes	UV protected, 2 layers of glass + Low-E, reversible



TECHNICAL INFORMATION	
Bottle types	Dimension of ventilation grille in mm
Bordeaux, rhine, champagne	-
Handle colour / Dimensions	Climate class
-	N
Lock	Refrigerant type / Amount
No	R600a / 50g
Door opening sensor	Power cord length
Yes	3 m
Display colour	Ventilation type
Colorful display	Integrated ventilation
Number of shelves	Temperature memory function
7	Yes, in case of power failure
Shelf height in mm	Defrosting
3x195 1x110 1x95 2x190 1x295 // 1x115 2x195 1x190 1x120 2x190 1x375mm	Automatic
Internal air circulation	Total volume
Yes, 2 fans	291 l
Carbon filter	Recommended use
No	Domestic/HoReCa
Internal dimensions (HxWxD) in mm	Internal humidity
1645x485x400	50-80%
Net / Gross weight	Cabinet material / Colour
98kg / 112kg	Metal / Black

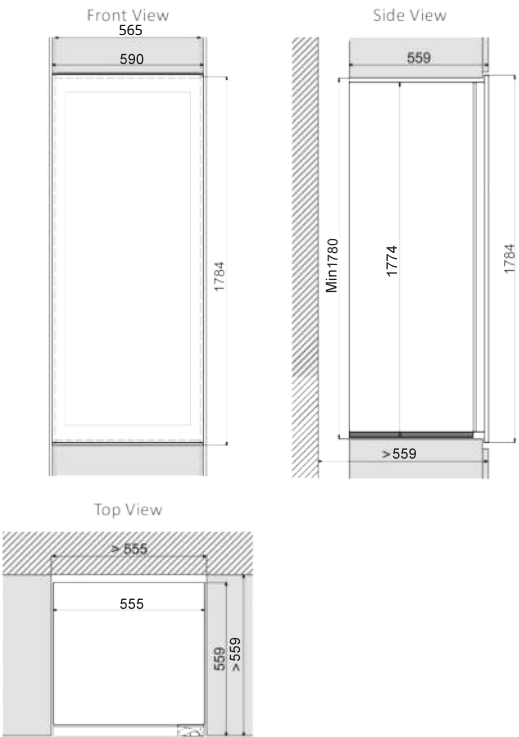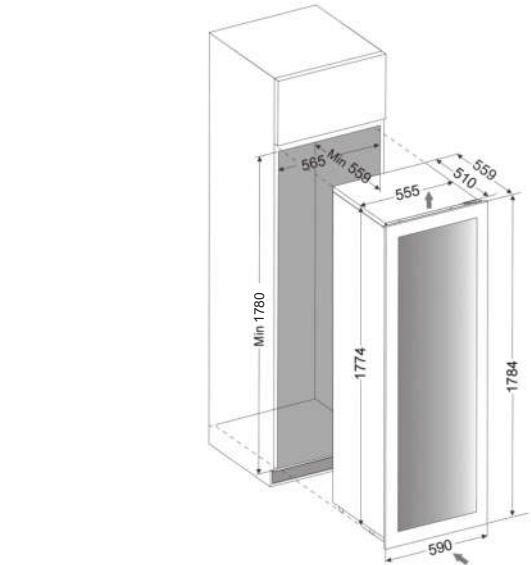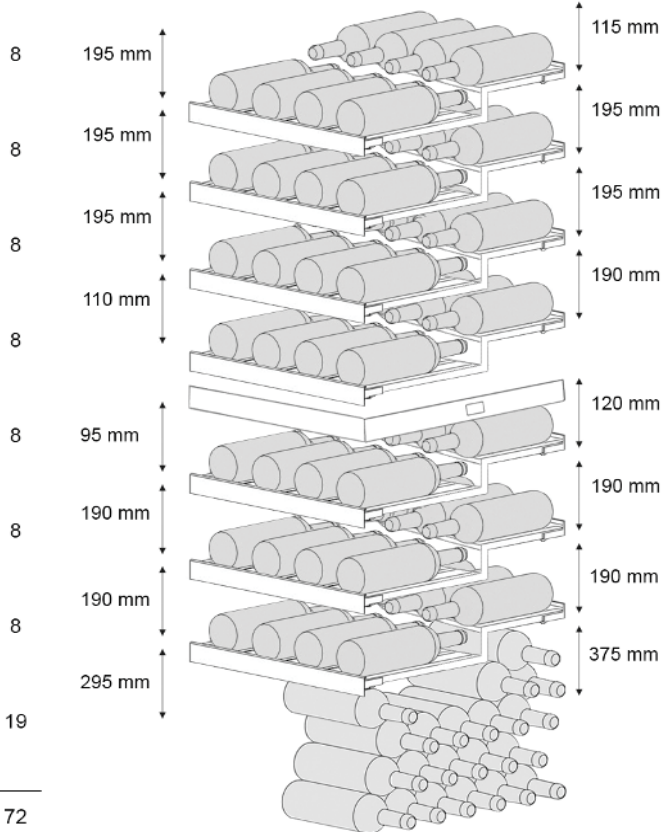

*The maximum bottle capacity of the appliance depends on the type and size of the wine bottles stored inside.

NOBLE-109.TO

Black Glass DVN-109.291DB.TO EAN: 5999558436421
Overlay Panel DVN-109.291DOP.TO EAN: 5999558436438

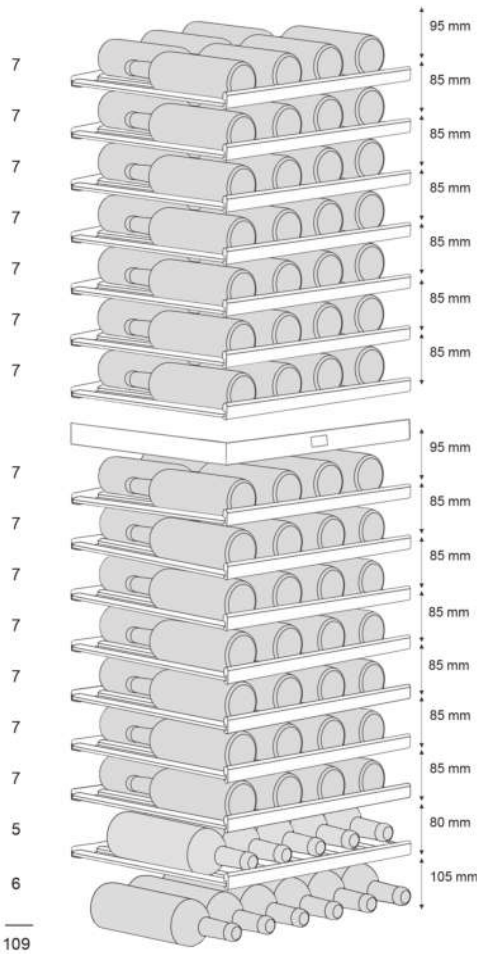

Door options






Black Glass



Overlay Panel

**Display shelf: 5+2

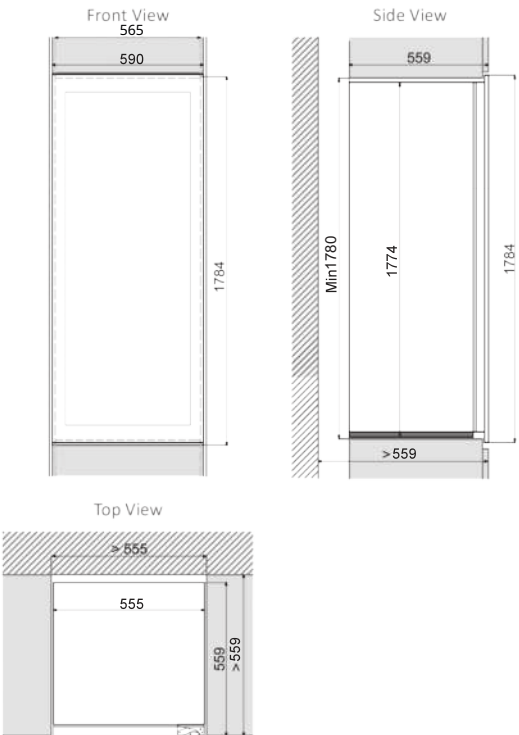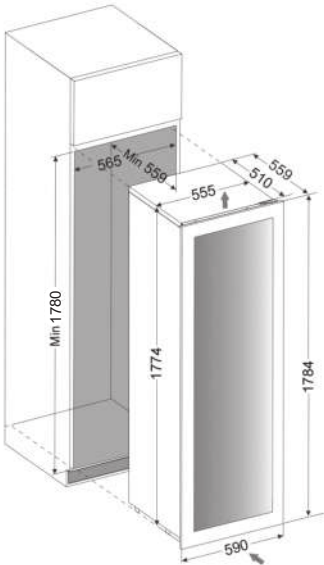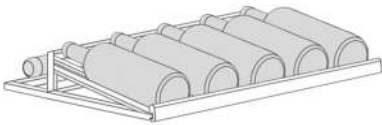

2

Cooling zone



109



40dB



5-10°C
10-18°C



Integrated



UV light protection



Telescopic wooden shelves



Champagne & prosecco



Multi LED light



Integrated ventilation



TFT touch screen



WIFI & Smart app

FEATURES	PERFORMANCE
Installation type	Cooling zones
Fully integrated	2
Bottle capacity	Cooling ranges
109	5-10°C // 10-18°C
Type of opening	Heater
Push-to-open	Yes
Type of hinges	Energy class
Soft closing Hettich hinge	G
Display type	Power consumption
TFT touch screen	168 kWh/a
Operating instructions	Rated power
Suitable for storing champagne bottles	220-240V, 50Hz, 0,75A
Installation requirements	Product dimensions (HxWxD) in mm
Integrated ventilation system	1784x590x565
Shelf	Packing dimensions (HxWxD) in mm
Telescopic wooden shelves & display shelf	1835x650x660
Low vibration	Noise level
Yes	40dB
Interior light	Cooling type
Multi LED light (white, amber, blue)	Fan assisted cooling, inverter compressor
WIFI & Smart App	Glass door
Yes	UV protected, 2 layers of glass + Low-E, reversible

TECHNICAL INFORMATION	
Bottle types	Dimension of ventilation grille in mm
Bordeaux, rhine, champagne	-
Handle colour / Dimensions	Climate class
-	N
Lock	Refrigerant type / Amount
No	R600a / 50g
Door opening sensor	Power cord length
Yes	3 m
Display colour	Ventilation type
Colorful display	Integrated ventilation
Number of shelves	Temperature memory function
15	Yes, in case of power failure
Shelf height in mm	Defrosting
1x95mm 6x85mm 1x95mm 6x85mm 1x80mm 1x105mm	Automatic
Internal air circulation	Total volume
Yes, 2 fans	291 l
Carbon filter	Recommended use
No	Domestic
Internal dimensions (HxWxD) in mm	Internal humidity
1645x485x400	50-80%
Net / Gross weight	Cabinet material / Colour
98kg / 112kg	Metal / Black

*The maximum bottle capacity of the appliance depends on the type and size of the wine bottles stored inside.
**One display shelf replaces two regular shelves.